

Numatic Steel Top Range

NVQ380 (Steel Tops)




StructFoam
Construction

Data Sheet

Rated Motor Power (W)	780 W
Power	230v AC 50/60Hz
Airflow Motor only	48 L/sec
Max Suction H ² O	2350
Kit	AS0 / AH0
Capacity	15 Litres
Cleaning Range (M)	26.4
Weight (Ready to use)	11.35 kg
Dimensions (W x L x H)	355mm x 355mm x 485mm
Mains Lead	HO5VV-F 10 x 2 x 1.00 mm ²
Protection Class	Class II
Sound Pressure	65 dB
Filter Type	TriTex
Dust Bag	NVM 1CH
Sound Power	75 dB(A)

Featuring an all-steel head, the NVQ range not only provides exceptional strength, it's also quite and efficient. The NVQ power head incorporates MicroTec noise reduction and a TwinFlo high-performance motor with handy NuCable system for quick and simple cable replacement.

Built to Last
Powerful & Efficient
Improved Filtration & Cleanliness
Handy Cable Replacement
Professional Specification Throughout

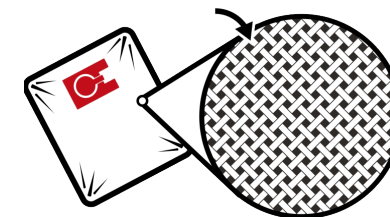

UNITED KINGDOM: www.numatic.co.uk

NETHERLANDS: www.numatic.nl

PORTUGAL: www.numatic.pt

GERMANY: www.numatic.de

SWITZERLAND: www.numatic.ch

SPAIN: www.numatic.es

FRANCE: www.numatic.fr

SOUTH AFRICA: www.numatic.co.za

Specification subject to change without prior notice
www.numatic.co.uk © Numatic International Limited